
4006i

1. Functional characteristics

- 360 degree opening
- Reference flow rates at 20 and 60 cm
H₂O: 52 ml/min, 140 ml/min

2. Recommended Uses

- To be used in combination with a drip-cup, usage without a dripcup viable in some conditions
- Layer, Quails, Broilers, Pullets



3. Product description

(a) Drinker composed by 3 elements:


- Inox body valve with 1/8 R thread
- Turned Inox Plot
- Inox Stem, printed and turned options available

(b) Weight: 14.9 grams


(c) Can be supplied pre-assembled on square pipes or in trays.

4. Ratings

Water flow for 4006i +- 15%

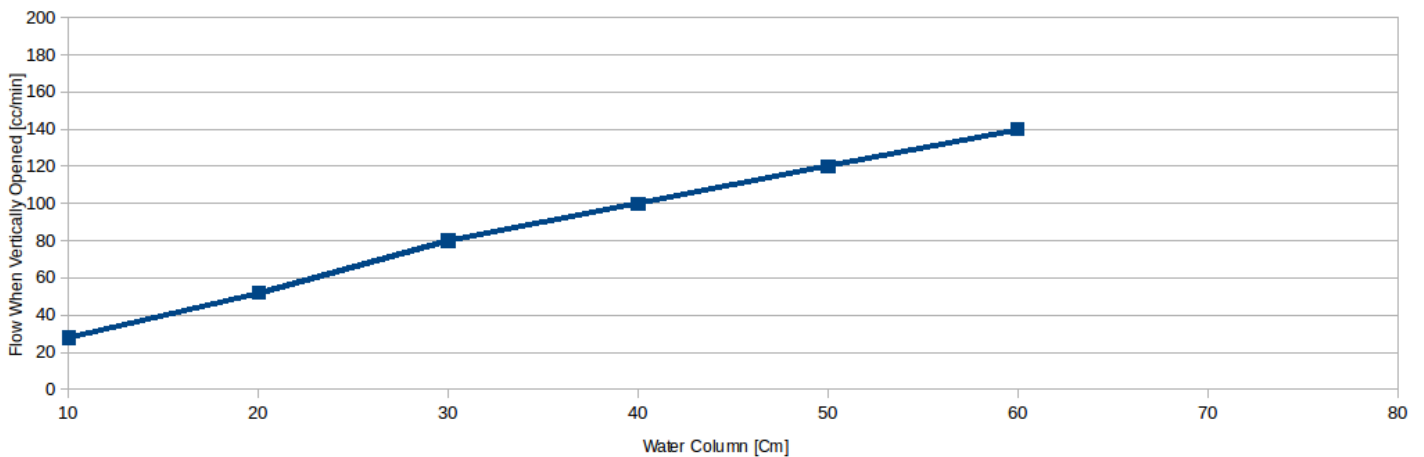

Opening forces for 4006i +- 15%

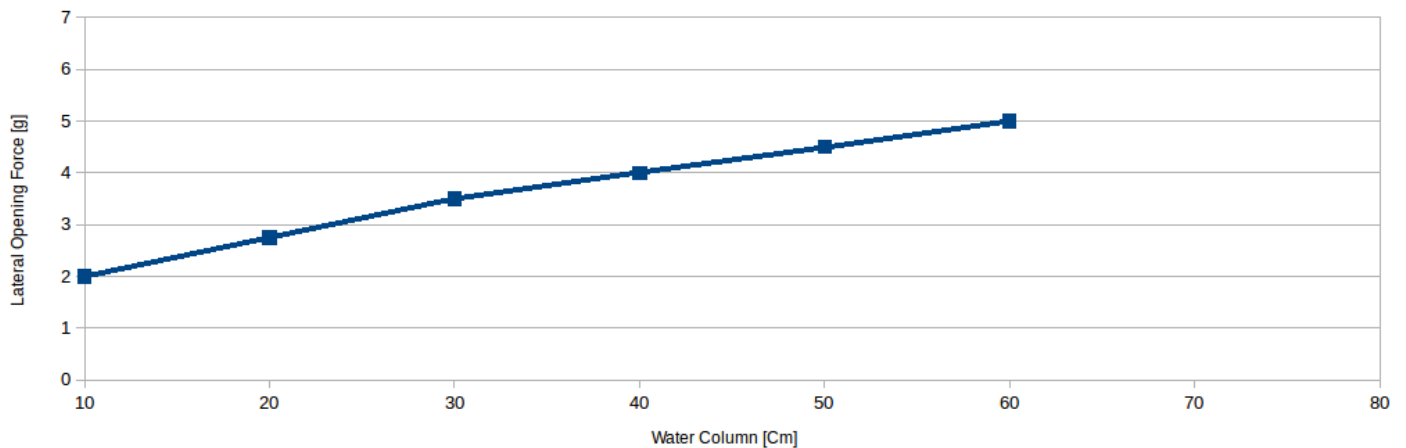

5. Ordering Options

4006i_XX

XX: specification of stem`s manufacturing process. "LL" for both stem and plot turned , "L" for turned plot and printed stem.

Es: use code 4006i_L to request a turned plot, 4006i_LL for both stem and plot turned

6. Product Revisions:

Document first created : 2017/06/14

Updated flow and forces tables, added weight data : 2018/01/15

Added ordering options : 2018/01/26

Modified codes for ordering options: 2017/05/31

DISCLAIMER:

Information contained in this document represents average properties obtained from commercial production lots and should not be considered guaranteed specifications.

Copyright © 2017, Corti Zoetecnici s.r.l

Via Volta 4, Monvalle (VA) 21020, Italy - info@cortizoetecnici.com - +39 0332 799 985