

NEW

4006 i MULTI-FLOW

The new evolution of Nipple Drinker




NEW 4006 i MULTI-FLOW

The new evolution of Nipple Drinker

Our 50 years experience in the field of nipple drinkers and the continuous research of the ideal drinking system for each type of animals and growth phase have allowed us to create the **new 4006 steel multi-flow**.

A depth experimentation has been conducted with extraordinary results. The 4006i stainless steel valve ensures a perfect capacity associated with an **"EXTRA-SOFT ACTION"** water supply which greatly facilitates the management of the breeding.

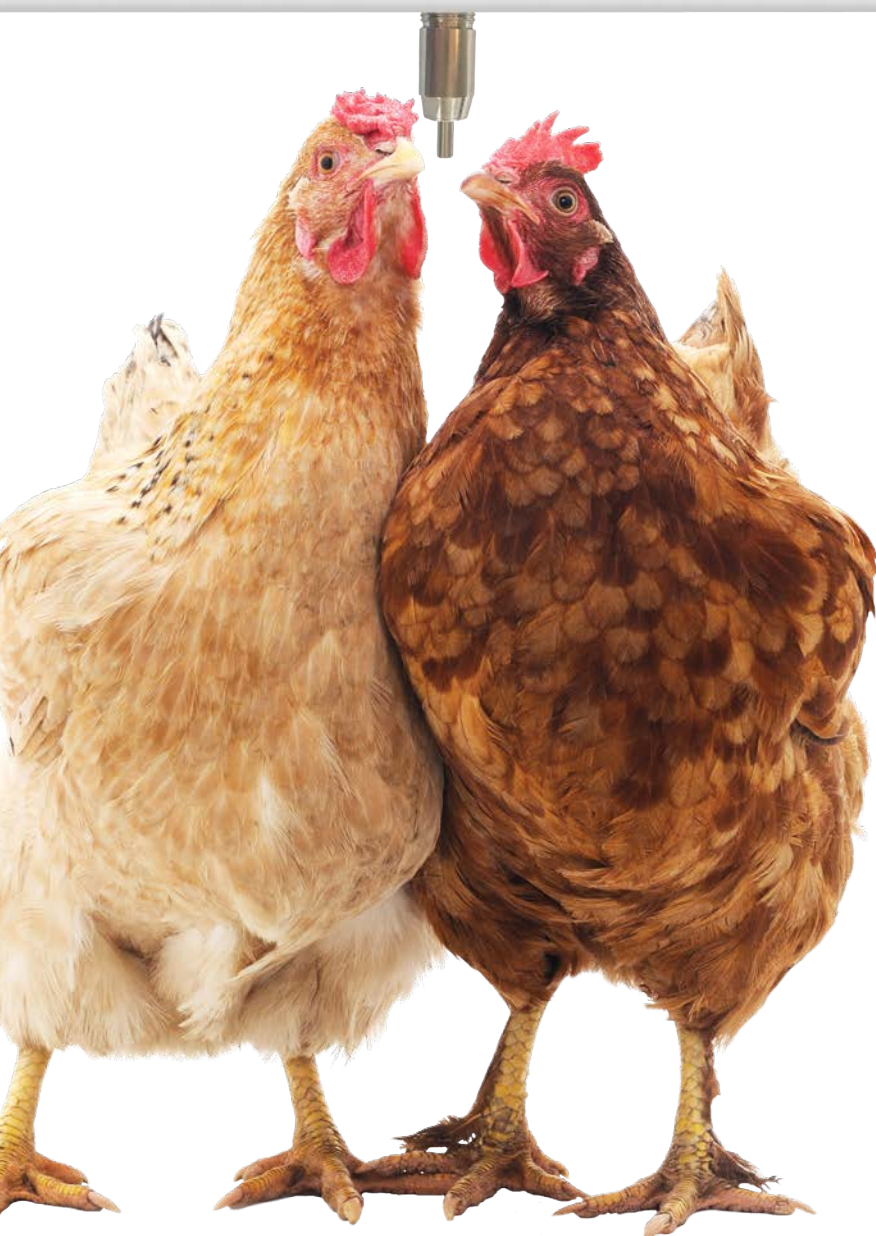

Highly strong and durable material

suitable for interaction with any diluted chemical product, for sanitary treatments both for the lines disinfection at the end of the breeding cycle.

Extreme manufacturing precision

guarantees absolute product uniformity at any point of installation within the sheds.

Increase in the number of animals per nipple

up to 48-50 chicks in the first hours of life and 28-30 adult animals (weighing up to 4 kg) under ideal environmental conditions.

Guaranteed perfect capacity and "EXTRASOFT ACTION" that does not need to contain waste water through drip-cup.

Features and Advantages

The 4006i stainless steel valve is **actuated very easily** from chicks of any genetic and weight **since the first hours of life** and meets the water needs of adult animals too avoiding splashes and waste of water, encouraging a profitable intensive breeding.

The product **allows to use high water column pressures (about 30 cm)**, from the first hours of life of the animal, avoiding the formation of annoying "air bubbles" inside the water transport pipes that are often caused by the use of very low pressures.

Also it allows, under ideal environmental conditions and healthy animals, to reach the end of the cycle with the same pressures, simplifying the management of the breeding.

The animal is able to regulate itself in the kind of drink in relation to the growth phases and the different water requirements (**Multi-flow notion**) that are also dependent on the different environmental conditions in the different world's areas.



The product ensures a perfect capacity not requiring the drip cup as containment of excess water.


It is recommended, however, **use in combination of pressure level indicators** to allow an immediate reading of the degree of satisfaction of the animals.

These characteristics make the 4006i the ideal nipple drinker for a simplified water use management in poultry farms.




Technical Features


- 360 degrees opening
- Reference Flow Rate at 20cm H₂O: 50 ml/min
- Reference Flow Rate at 60cm H₂O: 140 ml/min
- No need to use the drip-cup
- Suggested use of the pressure level indicator
- Broilers | Quails | Pullets | Layers | Breeders

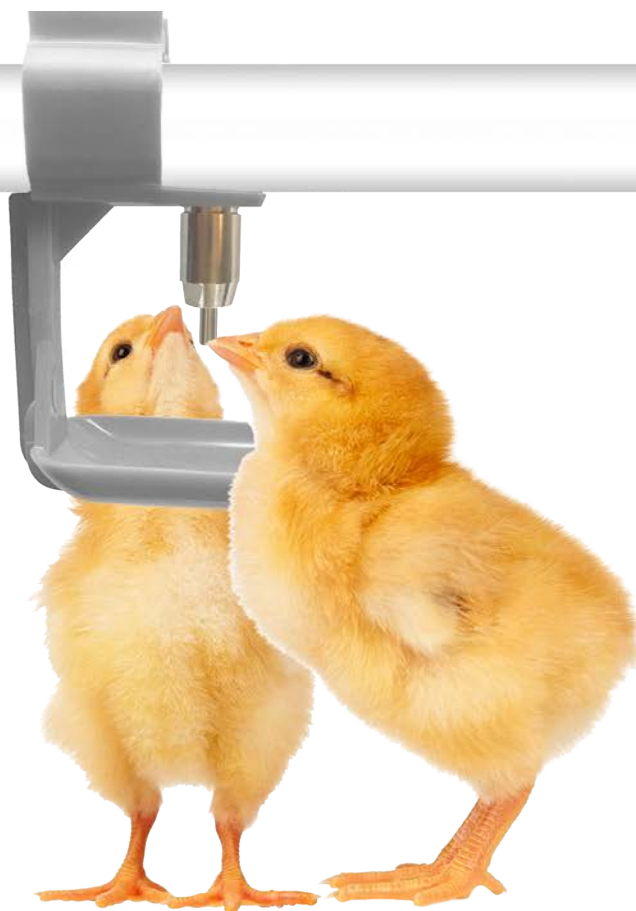

Opening Forces, +-15%
Ref. 4006i

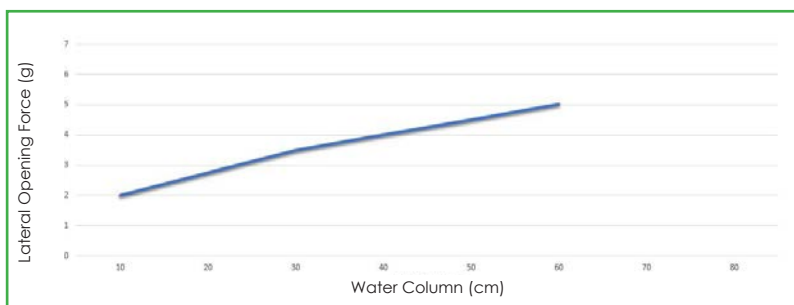

Water Flow, +-15%
Ref. 4006i

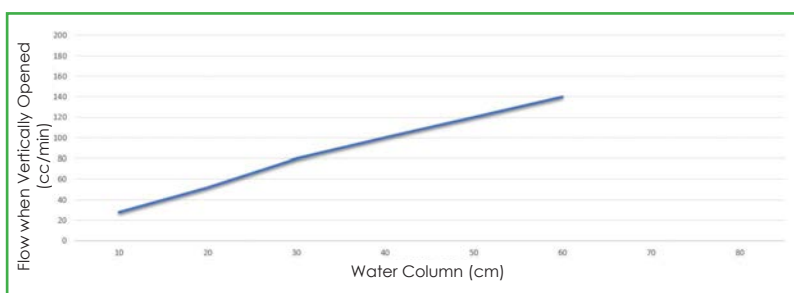

Corti Zootecnici Srl

Via Volta, 4
21020 Monvalle (Varese)

Tel. +39 0332 799985

Fax. +39 0332 799787

Email: info@cortizootecnici.com