



DRINKERS LINE

SNAR

Corti Zootecnici's Drinkers




Use a **QR code reader** on your device to access our website.

SNAP DRINKERS

Corti Zootecnici's SNAP line is specifically designed to satisfy watering needs of every genetic line since the first hours.

The ultra-light opening forces of the 360° opening is for an easier access to water, delivering the exact amount of water needed thanks to a strong correlation of force applied and flow provided.

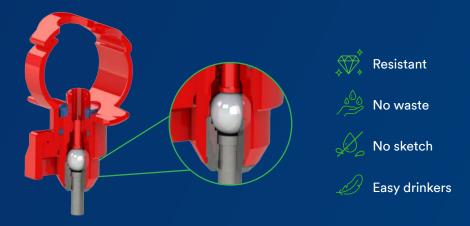

4731 G



- Reference flow rates at 20 cm H2O column: 40 cc/min
- Reference flow rates at 60 cm H2O column: 85 cc/min
- Discretionary use of the drip tray
- Layers|Pullets|Broilers
- Plastic round pipe support Ø 26.6 mm

4731



- Reference flow rates at 20 cm H2O column: 55 cc/min
- Reference flow rates at 60 cm H2O column: 125 cc/min
- Pressure level indicator tray or drip tray required
- Broilers
- Plastic round pipe support Ø 26.6 mm

4731 SV



- Reference flow rates at 20 cm H2O column: 60 cc/min
- Reference flow rates at 60 cm H2O column: 140 cc/min
- The use of the "pressure level indicator" cup or the drip-cup is required
- Breeders
- Plastic round pipe support Ø 26.6

4731 AQ



- Reference flow rates at 20 cm H2O column: 40 cc/min
- Reference flow rates at 60 cm H2O column: 85 cc/min
- Discretionary use of drip tray
- Layers|Pullets|Broilers
- Plastic square pipe support 22x22 mm

The fast-clip mounting system allow SNAP drinkers to be applied on PVC pipes using a square or round plastic holder, providing a strong and reliable fit without glue use.

The metallic seals of the SNAP line are made with first-choice material, making them suitable for the most demanding environments.

Key focus of the design of the internal components geometry was to satisfy the watering needs of the weakest animals too, since the beginning.

4731H



- Reference flow rates at 20 cm H2O column: 70 cc/min
- Reference flow rates at 60 cm H2O column: 160 cc/min
- The use of the "pressure level indicator" cup or the drip-cup is required in case of cold, temperate and humid climates
- Broilers Quails
- Plastic round pipe support Ø 26.6
 mm
- Also available as turned version (Art. 4731 HL)

4731 HH



- Reference flow rates at 20 cm H2O column: 65 cc/min
- Reference flow rates at 60 cm H2O column: 150 cc/min
- The use of the "pressure level indicator" cup or the drip-cup is requireda
- Broilers
- Plastic round pipe support Ø 26.6 mm

4731BHH



- Reference flow rates at 20 cm H2O column: 65 cc/min
- Reference flow rates at 60 cm H2O column: 150 cc/min
- The use of the "pressure level indicator" cup or the drip-cup is required
- Broilers
- Plastic round pipe support Ø 26.6 mm

4734



Safety clip for locking snap drinkers





DRINKERS LINE





Use a **QR code** reader on your device to access our website.



