




PRESSURE REGULATOR 4901N



Via Volta 4, Monvalle (VA) 21020, Italy
info@cortizootecnici.com | +39 0332 799985

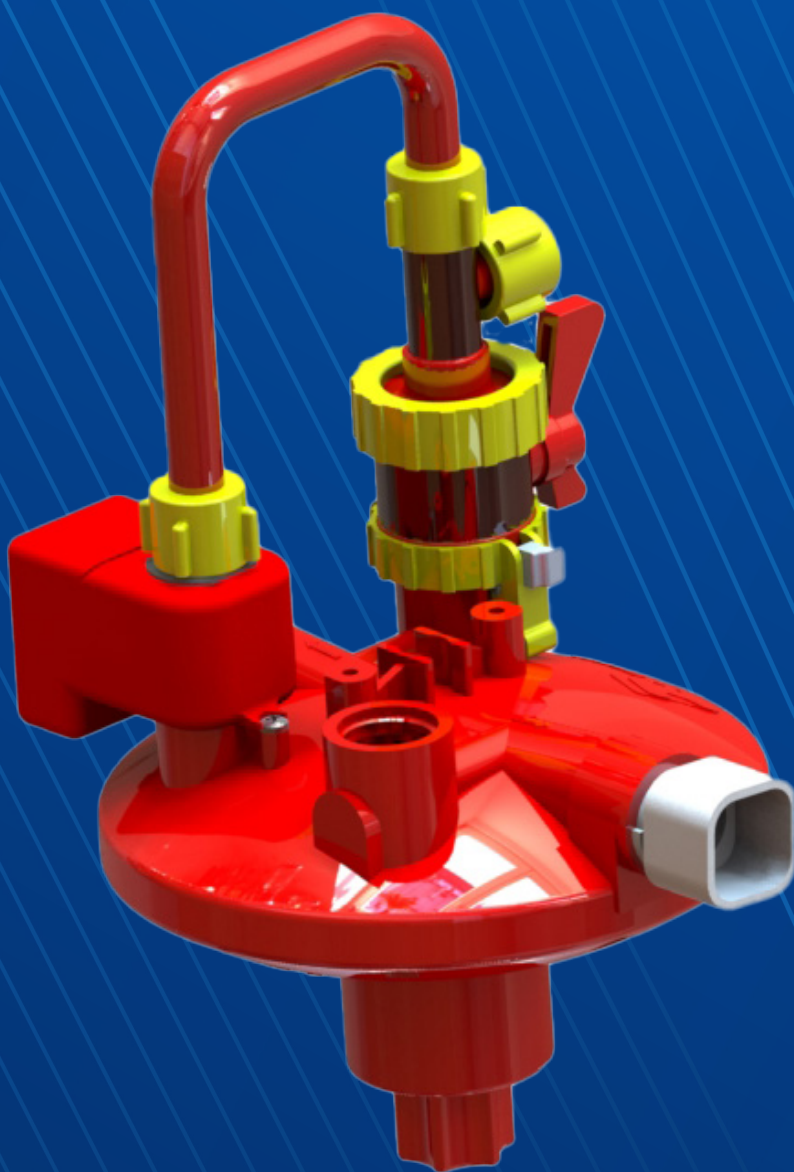

Use a **QR code**
reader on your
device to access our
website.

PRESSURE REGULATOR

4901N



Material:
ABS with UV protection



Weight:
~ 1.2 kg



Details:
Provision for automatic flushing valve.

SETTING

For lines up to 70 m: position pressure regulator 4901N at the beginning of the line;
For lines from 70 m to 140 m: position pressure regulator 4901N at the centre;
For lines over 150 m the line will be divided into two lines with the same positioning characteristics as read above.


Inlet pressure
3 - 4 Atm MAX

Outlet pressure
cm 10 H2O flow rate 6L/1
min

Outlet pressure
cm 30 H2O flow rate 8,8L/1
min

Outlet pressure
cm 60 H2O flow rate
12,4L/1 min

Outlet pressure
cm 90H2O flow rate 14L/1
min

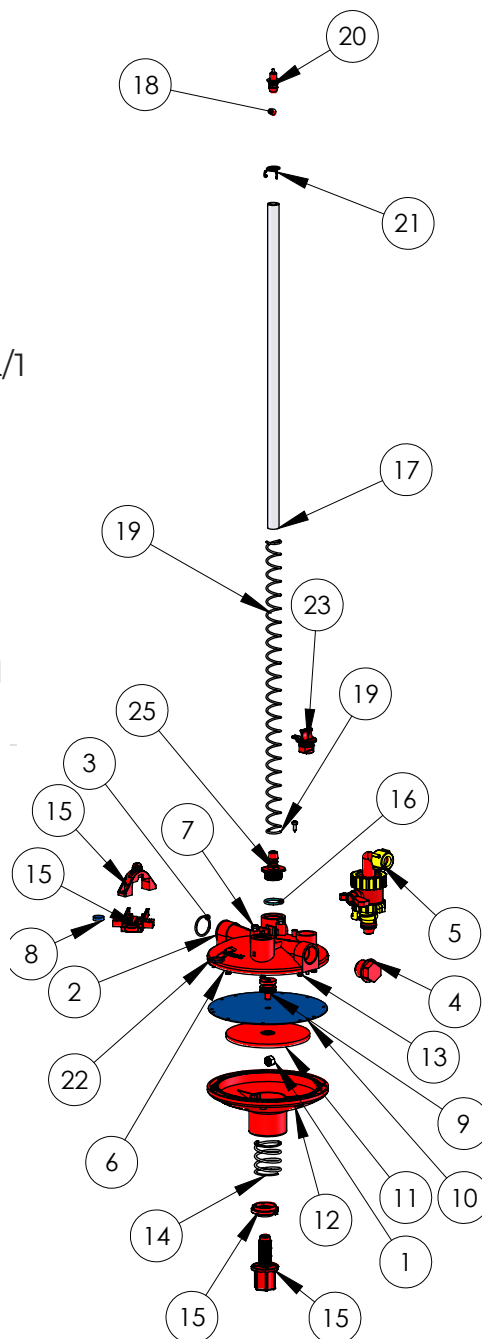

Num.	parte	Descrizione	PZ
1	ISO - 4034 - M8 - S		1
2	473302R	Corona Blocca OR R	1
3	473303	Anello OR	1
4	4744	As.Tappo	1
5	4779	As.Rubinet.Sf	1
6	480102	Guscio Superiore	1
7	480105	Vite	2
8	480107	Guarnizione	1
9	480111	Vite sping.	1
10	480112	Membrana	1
11	480113	Disco spingi membrana	1
12	480114	Guscio Inferiore	1
13	480116	Vite	12
14	480115	Molla	1
15	480150	Kit Particolari interni Reg.Press.	1
16	478405	Anello OR d3x21	1
17	4728A	Tubo Cristal Ø 12 L500 mm	1
18	4727A	Sfera D 9	1
19	4726A	Molla D3 450 mm	1
20	4849A	Valvola di sfiato	1
21	4750a	Fascetta elastica sfiato d12	1
22	480104	Anello OR 123 (d2.62-D17.86)	1
23	480110	Tappo	1
25	480118	riduzione	1