



CORTI ZOOTECNICI

Articles & Accessories for **Breeding**

MADE IN ITALY

PRODUCT CATALOGUE

@ corti_zootechnici in Corti Zootechnici
www.cortizootechnici.it



Articles and Accessories for **Breeding**



INTERNATIONAL PRESENCE

We produce and export our high-quality products all over the world.



COMPLETE SOLUTIONS

Specialists in the supply of complete drinking and feeding systems for both large-scale and family farms.



ZERO KM PRODUCTION


We design, engineer and manufacture all our products at our headquarters, controlling the entire production cycle.

MADE IN ITALY



Use a **QR code reader** on your device to access our website.

Instagram: [corti_zootechnici](#) LinkedIn: [Corti Zootechnici](#)
www.cortizootechnici.it

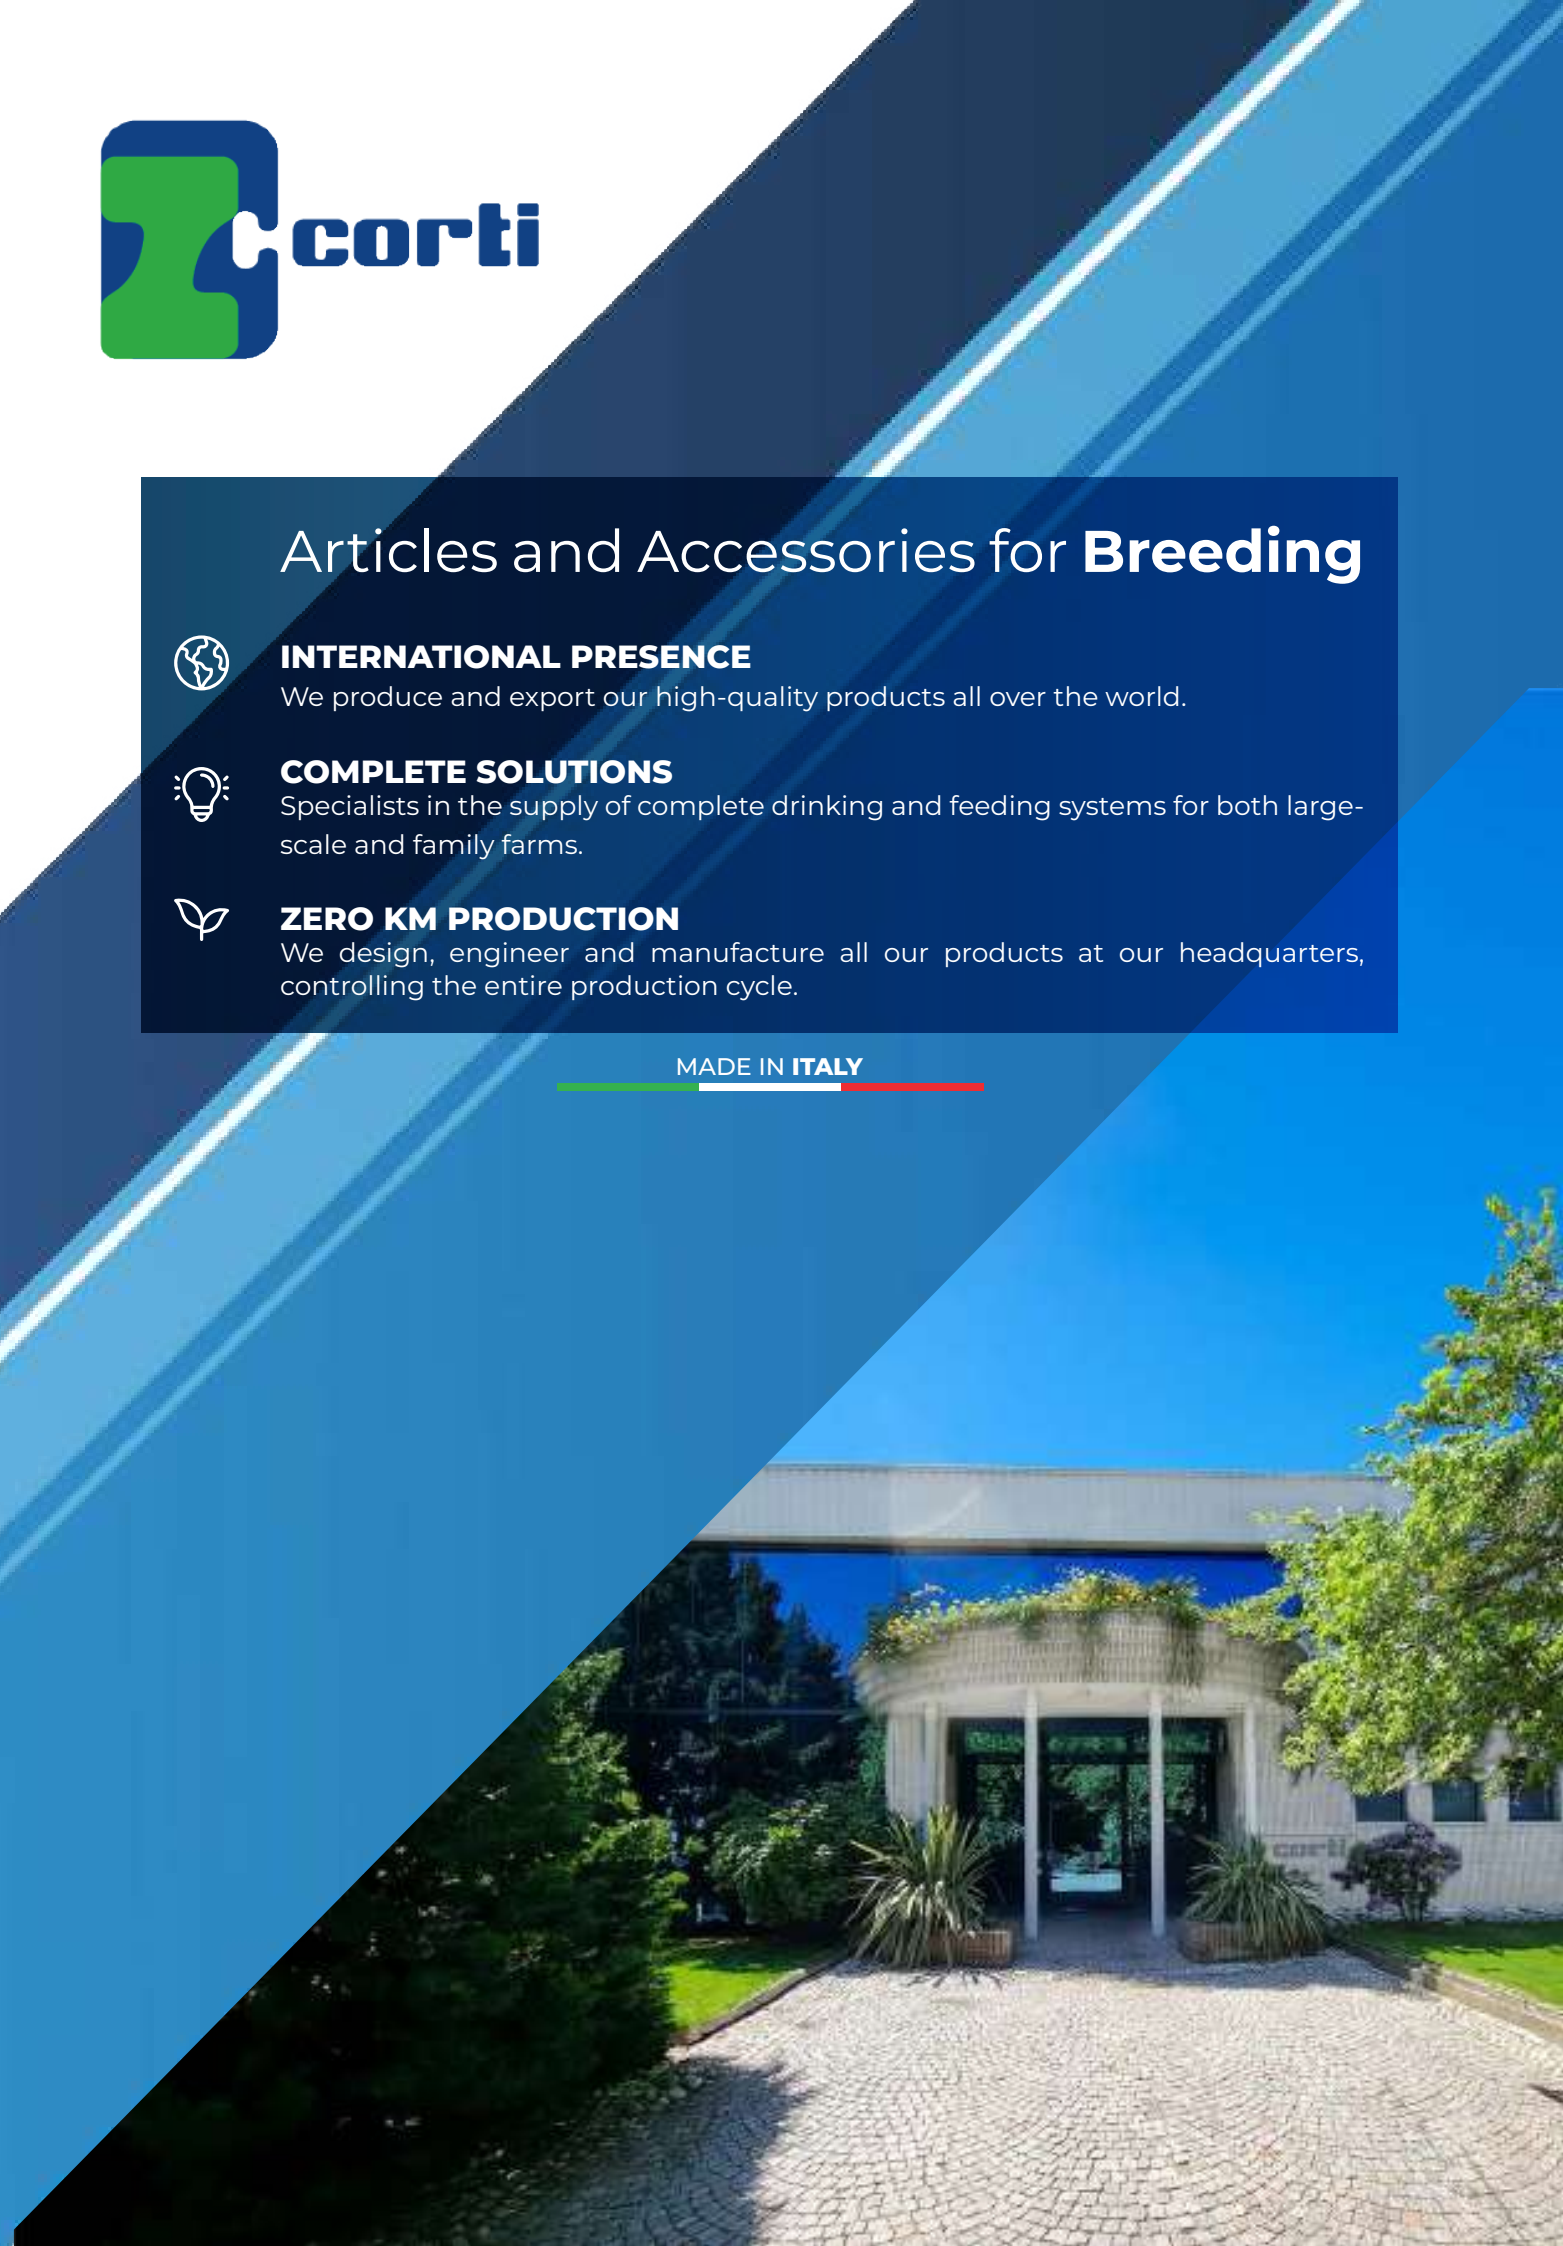

Main contacts



Contact

✉ info@cortizootechnici.com
☎ + 39 0332 799985
🌐 www.cortizootechnici.it
📍 St. A. Volta 4, Monvalle 21020 (VA) Italy

Social

in Corti Zootechnici
📷 corti_zootechnici
📺 @Corti Zootechnici
f Corti Zootechnici Srl



Use a QR code reader
on your device to access
our website.

DRINKING


Our drinking systems are the result of long experience. They are designed to give the operator all the advantages of robustness and functionality.

Our technology allows us to have the softest drinker (less than 1gr opening effort), perfect water delivery, durability, quality, high flow rate (more than 200cc/min) without the need for drip collectors, we also present the new bypass system for pressure line flushing.


Discover our wide range of watering products.




DRINKING SYSTEMS - FLOOR

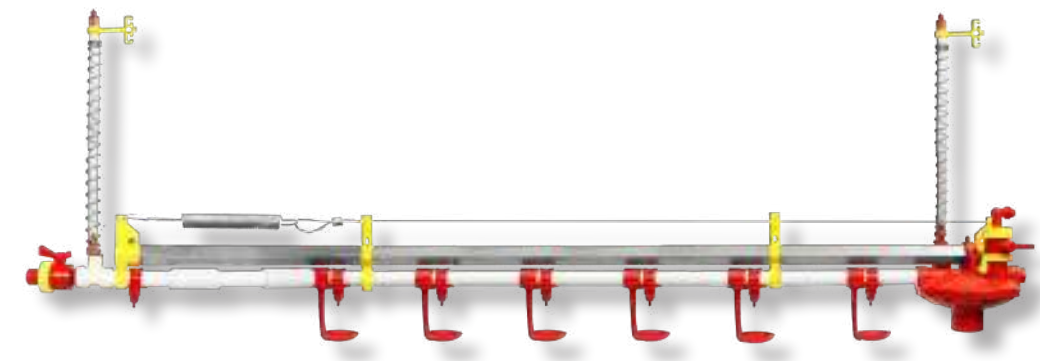

Drinking line with round pipe (ø 26.6 mm)

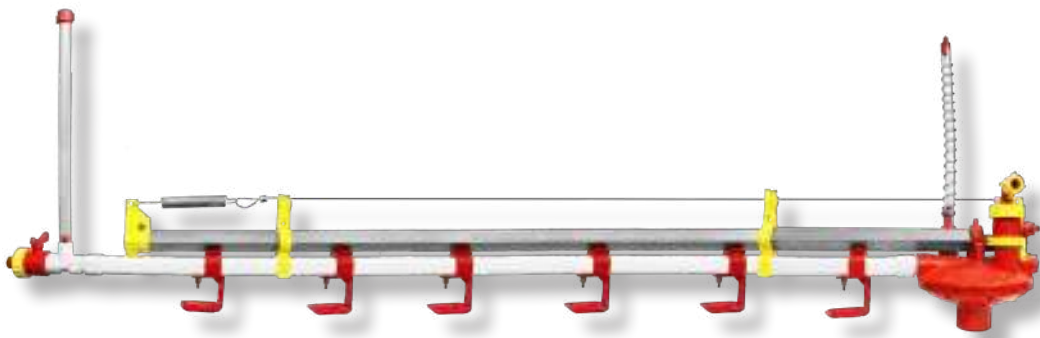

Drinking line with square pipe 22x22 mm

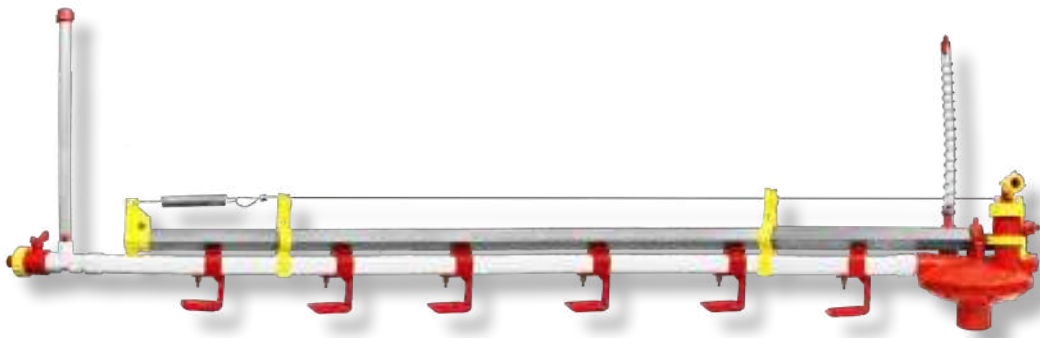

Drinking line with square pipe 28x28 mm



4733T
Slide connector for round pipe ø26,6mm
4736 T
Round pipe, PVC ø26,6mm holed



4368
Slide connector for square pipe
4101
Square pipe 22x22mm




4990V
Aluminium V-shaped support bar for round and square pipe
4732V
Galvanised connector for aluminium V-profile



47353000
Galvanised profile 25x25mm
4732L
Sheet metal connector for galvanised pipe



47363000
Galvanised round support pipe L=3mt ø25mm

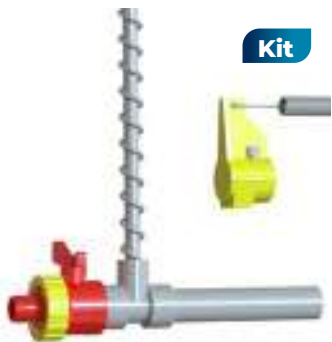

4870
End-of-line kit for round pipe spring height: 900mm, ø9mm



4854
End-of-line kit for round pipe spring height: 900mm, ø9mm




4870N
End-of-line kit for round pipe spring height: 500mm, ø12mm



4957N End-of-line kit for square pipe h: 500mm, ø12mm
4957F Flushing version with art.4773 P

N°	Article code	Description
1	4728A	Cristal Pipe 12 L500mm
2	4727A	Sphere ø 9mm float
3	4849A	Vent valve
4	4726A	Spring D3 450 mm
5	4826A	Cristal pipe support on rope
6	4738	Bush cable clamp
7	4739	Spring T-Df2-De16-L137
8	4742TFLT	Anti roost cable F
9	4751	Rondella flat 6M
10	4781V	Tap PL.3/4" with rubber holder ø 20mm
11	900614	Nut M6
12	4729A	Fitting with hose holder ø 12mm
13	4750A	Elastic vent band ø 12mm

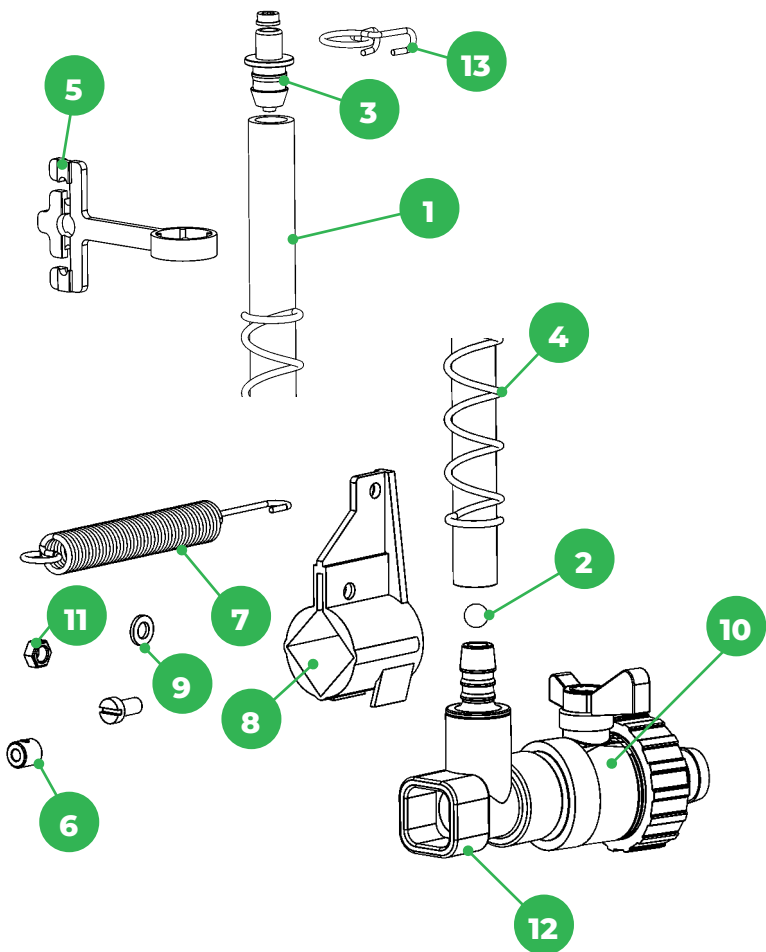

LIFTING SYSTEMS

600 KG



- Capacity 600 Kg
- Colour Green
- Actuating force 15 Kgf
- Pulley diameter 50,8 mm

- 4422F Exclusive friction lock: The crank automatically brakes when it is released, when pulling, suspending or releasing loads.
- Charging reel 12,5 m
- Product weight 3 Kg

1350 KG



- Capacity 1350 Kg
- Colour Green
- Actuating force 7,1 Kgf
- Pulley diameter 50 mm

- 4436 Screw winch H-3600 suitable for the suspension of automatic supply lines.
- Charging reel 10,5 m
- Product weight 9,8 Kg

900 KG



- Capacity 900 Kg
- Colour Silver
- Actuating force 12 Kgf
- Pulley diameter 54 mm

- 4424F To be mounted on the wall at the head of the shed Exclusive friction lock: The crank automatically brakes when released, when pulling, suspending or releasing loads.
- Charging reel 19 m
- Product weight 5,5 Kg

907 KG



- Capacity 907 Kg
- Colour Red
- Actuating force 12Kgf
- Pulley diameter 51 mm

- 4425 Winch for supply and drinking lines, preferably to be mounted on the ceiling in the middle of the shed, so as to halve the load on the cable
- Product weight 10,7 Kg

1200 KG



- 4433E Electric winch
- Capacity 150/300 Kg
- Colour Red
- Product weight 11,6 Kg

- 4434E Electric winch
- Capacity 300/600 Kg
- Colour Red
- Product weight 16,8 Kg

4719 Plastic pulley
ø60mm max. load capacity 40kg

4719H Nylon pulley
ø60mm max. load capacity 70kg

4719P Plastic pulley
ø22mm max. load capacity 30kg

4713 Pulley ø 90 mm

1601 Pulley ø 90 mm with coupling

4716 Galvanised cable clamp ø 5 mm

4738 Steel sleeve clamp

4747 Cable clamp with washer for steel cable

4746 Plastic screw clamp

Galvanised steel cable
4714 ø5mm, 133 threads
4737 ø1,6mm, 19 threads
4715 ø4mm, 19 threads

4718 White polyester rope ø3,2mm

4767 Two-hole tensioning plate

4478 Polyester cable orange ø6mm

Kit

4480 Central ceiling hoisting kit, consisting of winch, anchor plate, threaded bar, two nylon pulleys ø60mm. Can be used for drinking and supply lines.

4860F Feed line lifting kit. With the use of winches and pulleys, quick lifting of the lines is ensured, allowing easy access to the farm area during maintenance and cleaning operations. The cable can be positioned to work in any direction, thanks to the special design of the ø90 mm sheave.

4481 Central ceiling hoisting kit, consisting of winch H3006, anchor plate, threaded bar, two nylon pulleys ø60mm. Can be used for drinking and supply lines.

- 4415 Winch i. screw H-2000 mm
- 4426 Plate for winch fixing H-2000 mm
- 4428 Galvanised screw 8X35 mm
- 4704 Washer ø 8 mm
- 4705 Galvanised threaded rod 333 mm
- 4706 Zinc nuts
- 4707 Galvanised washer ø 8 mm
- 4719H Pulley ø 60 mm

- 4422F 600 kg winch with clutch
- 470201 Galvanised washer 8.4x16x1.6 mm
- 4703 Screw ø 8 mm galvanised
- 4704 Washer ø 8 mm
- 4705 Galvanised threaded rod 333mmø8 mm
- 4708 Galvanised threaded rod 333mmø14 mm
- ... contact us to see the complete list

- 4428 Galvanised screw 8X35 mm
- 4436 Screw winch 1350 kg
- 4704 Washer ø 8 mm
- 4705 Galvanised threaded rod 333 mm ø8 mm
- 4706 Zinc nuts
- 4707 Galvanised washer ø 8 mm
- 4719H Pulley ø 60 mm

- 4427 Crank handle for line adjustment via lifting kit art. 4480/ 4481




Kit

4862
Pulley $\varnothing 90$ mm, with fixing kit, ideal for wall mounting in drinking line lifting kits



Kit

4426
Mounting plate kit for winch 4425

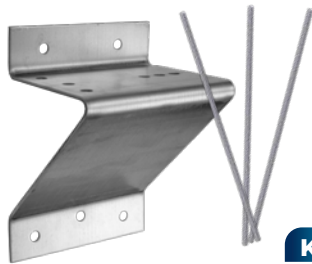

Kit








4861
Mounting Plate Kit for winch 4422-4424F



4711
Galvan. eyebolt $\varnothing 14$ mm



4712
Galvan. clevis $\varnothing 12$ mm

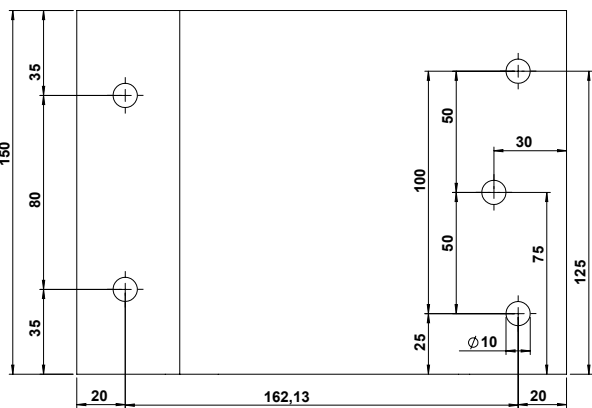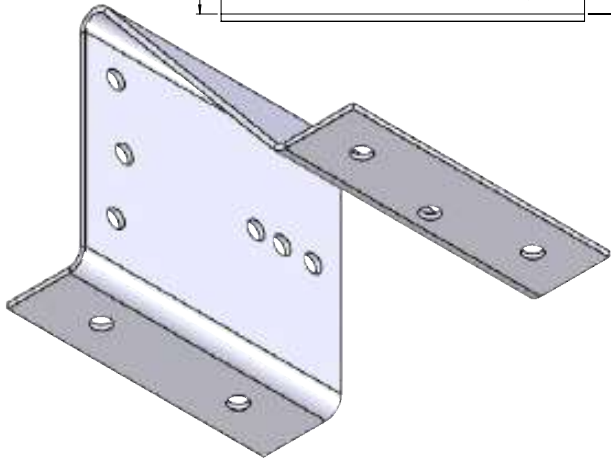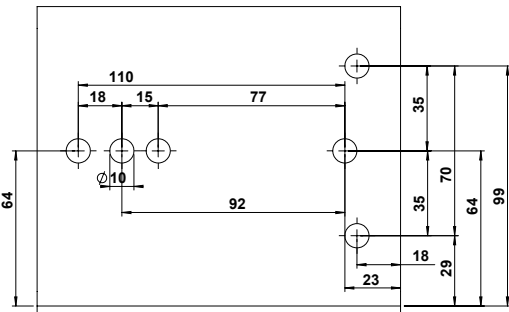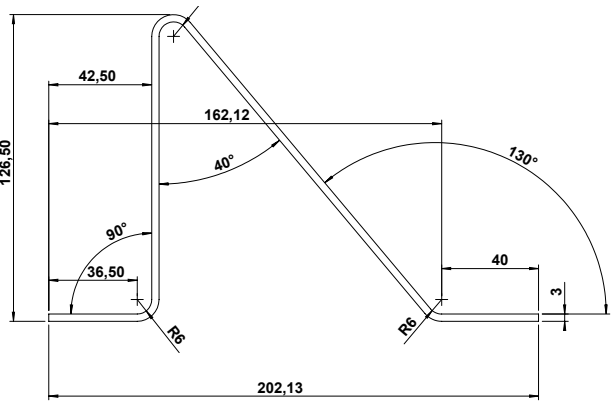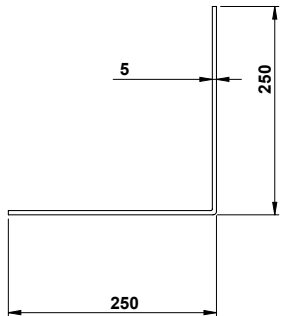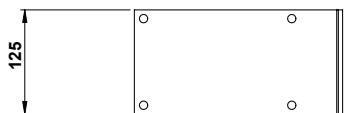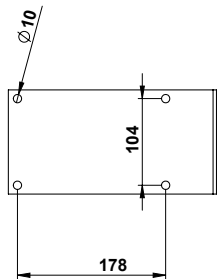

DRIP CUP




Wide range of choices, sizes, heights, widths available to meet the needs of each animal.



The trays are designed to keep the litter dry.



Provides indications of the pressure level of the drinking line.

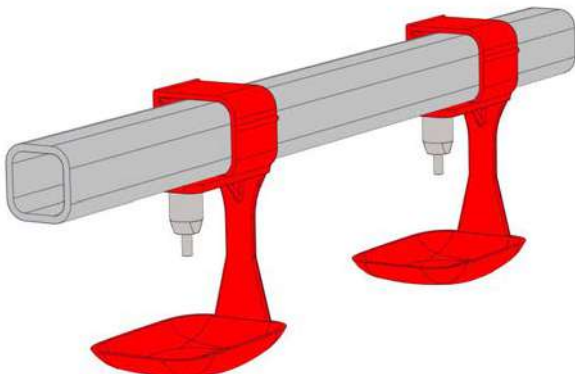

4613CC
Drip cup for 22x22 mm square pipe, grey version: 4613CCG

4613CCN
Drip cup for 22x22 mm square pipe, grey version: 4613CCNG

4613TQ
Drip cup 22x22 mm square pipe for SNAP

4613ZN
Drip cup for 22x22 mm square pipe

4613N
Drip cup for 22x22 mm square pipe, yellow version: 4613NG



4613TV
Drip cup for round pipe $\varnothing 22$ mm

4613TT
Drip cup for round pipe $\varnothing 26,6$ mm for SNAP

4613BCC
Drip cap for square pipe, 28x28mm

4613B
Drip cap for square pipe, 28x28 mm, grey version: 4613BG

4613Z
Drip cup for square pipe 22x22 mm, yellow version: 4613ZG, grey version 4613ZC



4640
Drip cup



4616
Drip cup



4606
Drip collection channel 120° - length on request

4609
Drip collection channel 90° - length on request

360° DRINKERS

Corti Zootecnici's Drinkers



UV and chemical
resistance




High-strength, high-
quality materials



Excellent sealing,
zero water waste and
dry litter

DRINKERS LINE - SYSTEM 360°

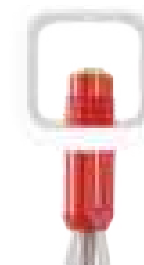

The lightness of the 360° drive facilitates drinking for the animals by ensuring that the water flow rate is delivered directly to the nozzle in proportion to each animal's needs, avoiding splashing and wastage.



4002HS

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 65 cc/min, 160 cc/min

Square pipe 22x22 and 28x28



4002H

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 60 cc/min, 160 cc/min

Recommended uses

Dirt cup optional

4002HL Turned version



4002HH

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 65 cc/min, 180 cc/min

Recommended uses

With drip cup



4004

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 40 cc/min, 100 cc/min

Recommended uses

With drip cup - A terra



4006H

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 50 cc/min, 140 cc/min

Recommended uses

With drip cup



4006HH

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 80 cc/min, 190 cc/min

Recommended uses

With drip cup

4006HHL Turned version



4006I

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 70 cc/min, 160 cc/min

Recommended uses

With drip cup

4006ILL Turned version



4007H

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 34 cc/min, 100 cc/min



4007HH

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 34 cc/min, 100 cc/min



4011HH

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 46 cc/min, 126 cc/min



4002R

Functional Features

Reference flow rates at 20 and 60 cm H2O column: 28 cc/min, 100 cc/min

Recommended uses

Dirt cup optional



VERTICAL SYSTEM DRINKER LINE



Corti Zootecnici's vertical action drinkers are specially designed to be adapted to laying and breeding farms.

The care used in production and the composition of the stainless steel parts make the vertical drinkers more resistant to wear and tear in order to guarantee an unlimited service life.

The design of the individual internal components of the trough guarantees an optimal water supply.

4001

Functional Features
Reference flow rates at 20 and 60 cm H2O column: 40 cc/min, 100 cc/min

Recommended uses
With drip cup or drip collection channel



4003

Functional Features
Reference flow rates at 20 and 60 cm H2O column: 40 cc/min, 100 cc/min

Recommended uses
With drip cup



4005R

Functional Features
Reference flow rates at 20 and 60 cm H2O column: 77 cc/min, 180 cc/min

Recommended uses
With drip cup



CONSTANT LEVEL DRINKERS WITH DRIP CUP



4260R
Acquapresente ST weaning drinker for square pipe 22 x 22 cm



4020
Chick drinker with extension, SP, quick release



4019R
Chick drinker with extension, SP, quick release



4250R
Drinker circular cup, SP, quick release




4618
Laying and poultry cup, to combine with art. 4005 R



4619
Chick cup, to combine with art. 4005 R


SNAP DRINKERS

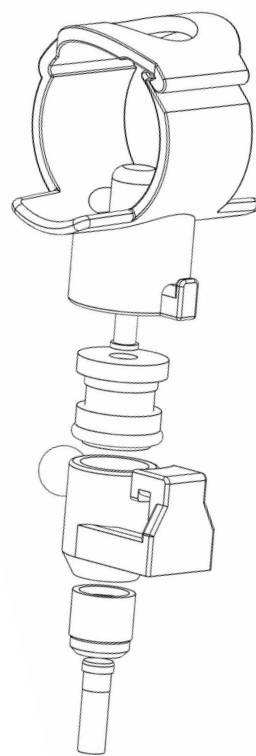

The 360° actuation facilitates drinking for the animals by ensuring that the water flow rate is delivered directly to the beak in proportion to each animal's needs, avoiding waste.

Through the quick clip system, SNAP drinkers have the possibility of being attached to the feed lines directly on the rigid PVC pipes by means of the practical round or square tie without the use of glue products.

Also available without tie.

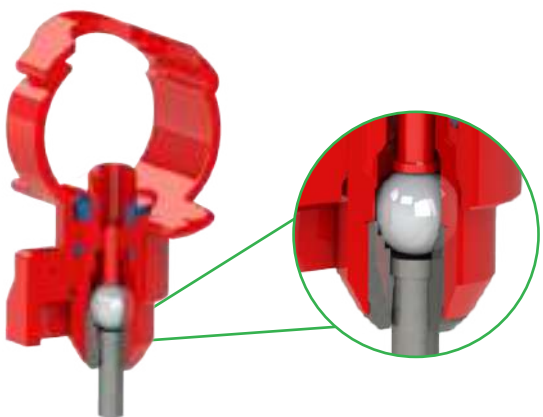

- Resistant
- No waste
- No splashes
- Facilitates drinking




4731
Super flow snap drinker, coarse lower part, connection for round pipe ø26,6 mm



4731G
Snap drinker, coarse lower part, connection for round tube ø 26,6mm



4731SV
Snap drinker 4002H on snap body coarse bottom part attachment for round pipe ø26,6mm

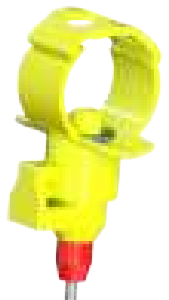


4731H
Snap drinker 4004H on snap body lower part small round pipe connection ø26,6mm



4731HH
Snap drinker on snap body, small bottom part, attachment for round pipe ø26.6 mm



4731BHH
Snap drinker on snap body, small bottom part, attachment for round pipe ø26.6 mm

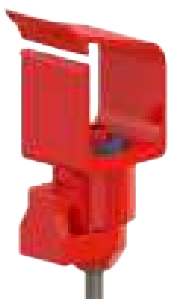


4731AQ
Snap drinker, coarse lower part, 22x22 mm round pipe connection



4734
Safety clip for locking snap drinker

TAPS

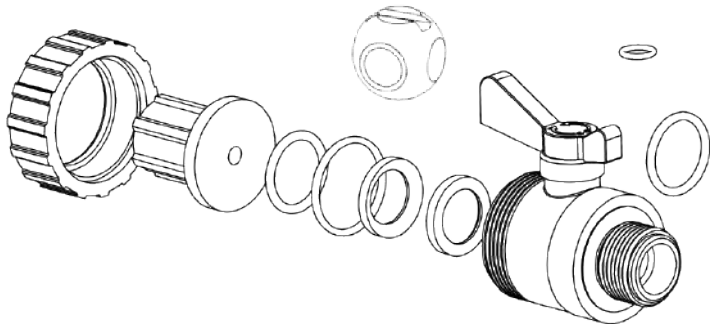

- 🔍 Studied down to the smallest detail;
- 🌿 Wide range of selection;
- 🏆 High quality;
- ♻️ Durable materials;
- ⌚ Long-lasting.

4778
Ball tap 3/4" with 90° exit for pipe ø 12 x 17 mm with ring nut

4778Q
Ball tap 3/4" for pipe ø12x15mm with ring nut

4778D
Ball tap 3/4" for tube ø 12x17mm with ring nut

4781
3/4" ball tap cristal

4781V
Tap 3/4" M with hose connector ø22mm

4783
3/4" ball tap with 90° outlet, crystal control fitting

4784
Ball tap 3/4" M aplug 3/4" M

4785
Ball tap 3/4" M with round pipe fitting ø26.6mm

4779
Ball tap with bypass for regulator available for 15 mm and 17 mm hose, straight or L-shaped outlet

4771L
Connection ø1/2" for corner tap

4771T
T-connection flex tube or spiral øint12.5x15mm

4771V45
Tap shank with 45° rubber connection

4773Q
Yellow ring nut for pipe ø12.5x15mm

4773D
Yellow ring nut for pipe ø12.5x17mm

4771C
Straight connection for tube tap

ANTI ROOST SYSTEM

4742
Support for 22x22mm square PVC pipe and 25x25mm or ø26.6mm RP

4742T
Support for round PVC pipe ø26.6mm and 25x25mm or ø26.6mm RP

4742T2
Support for round PVC pipe ø26.6mm and 25x25mm or ø26.6mm RP

4742TOA
Support for 28x28 mm square PVC pipe

4742TQ
Support for 22x22mm and ø25 mm square pipe

4742TT
Support for round pipe ø25 mm and ø26,6 mm

4742QT
Support for 25x25 mm tube, ø26,6 mm

4742QQ
Support for 25x25 mm, 22x22 mm

4950
Semi-support for V-profile

474202
Extension for double anti-roost wire support

4742V
Start/end of line kit: two anti-roost supports and a clip for attaching the pressure regulator to the aluminium V-profile

4742TQT
Support for 22x22mm square PVC ø30 mm

4742TFTQ
Support for galvanised ø 25 mm square pipe

4742TFQT
Support for ø 25mm galvanised pipe

4742TFTT
Support for round pipe ø 25 mm galvanised and tube ø26,6 mm

4742TFL
Support for galvanised support bar and pipe ø26,6 mm

4742TFLT
Support for galvanised bar and square PVC pipe

4742TFLQ
Support for galvanised bar and square PVC pipe

HYDRAULIC SECTION



4804E | 4804GE
Dispenser of 25-RE5
adjustable 1%-5%.



9201
Industrial filter with
cartridge 50 mic.



9210
Self-cleaning filter 3/4"
mains washer 90mcr



9211
Filter with washable
polyphosphate
cartridge + unscrewing
and screwing pliers



6302M
1/2" fixing collar fitted



6305 | 6306
Plastic feed collar ø 32
mm threaded
3/4" | 1/2"

Kit



Main water supply panel



4807CV
Litres counters



4807ICV
Electric flowmeter
with counter
output



4815
Pressure gauge for
filter and regulator

Kit



4803M
Metal pressure
reduction kit
1.5/7bar

Kit



MAGNETIC
FLOWMETER KIT

4807M35 | 0,05-35 LT./MIN

- 480104 Gasket
- 480702 Fitting for flowmeter
- 4807MIF01 Cable for magnetic flowmeter
- 4807MIF02 Battery charger for digital flowmeter
- 4807MIF03 Flowmeter kit board (2 clean outlets)
- 4807MIF04 Protection box
- 4807MIF35 Magnetic flowmeter 0.05-35 l/min

4807M75 | 0,10-75 LT /MIN

- 4807MIF01 Cable for magnetic flowmeter
- 4807MIF02 Battery charger for digital flowmeter
- 4807MIF03 Flowmeter kit board (2 clean outlets)
- 4807MIF04 Protection box
- 4807MIF75 Magnetic flowmeter 0.10-75 l/min



4804I
Peristaltic pump

FEEDING


Corti Zootechnici has been producing feeders for over forty years to optimise animal growth throughout the life cycle.

Feeding in poultry sheds is essential to ensure the health and growth of the animals. The choice of feeders for poultry sheds is an important element in ensuring efficient and clean feeding, here you will find a wide range of choice, from weaning to fattening.



INFINITY

Corti Zootecnici's Feeder

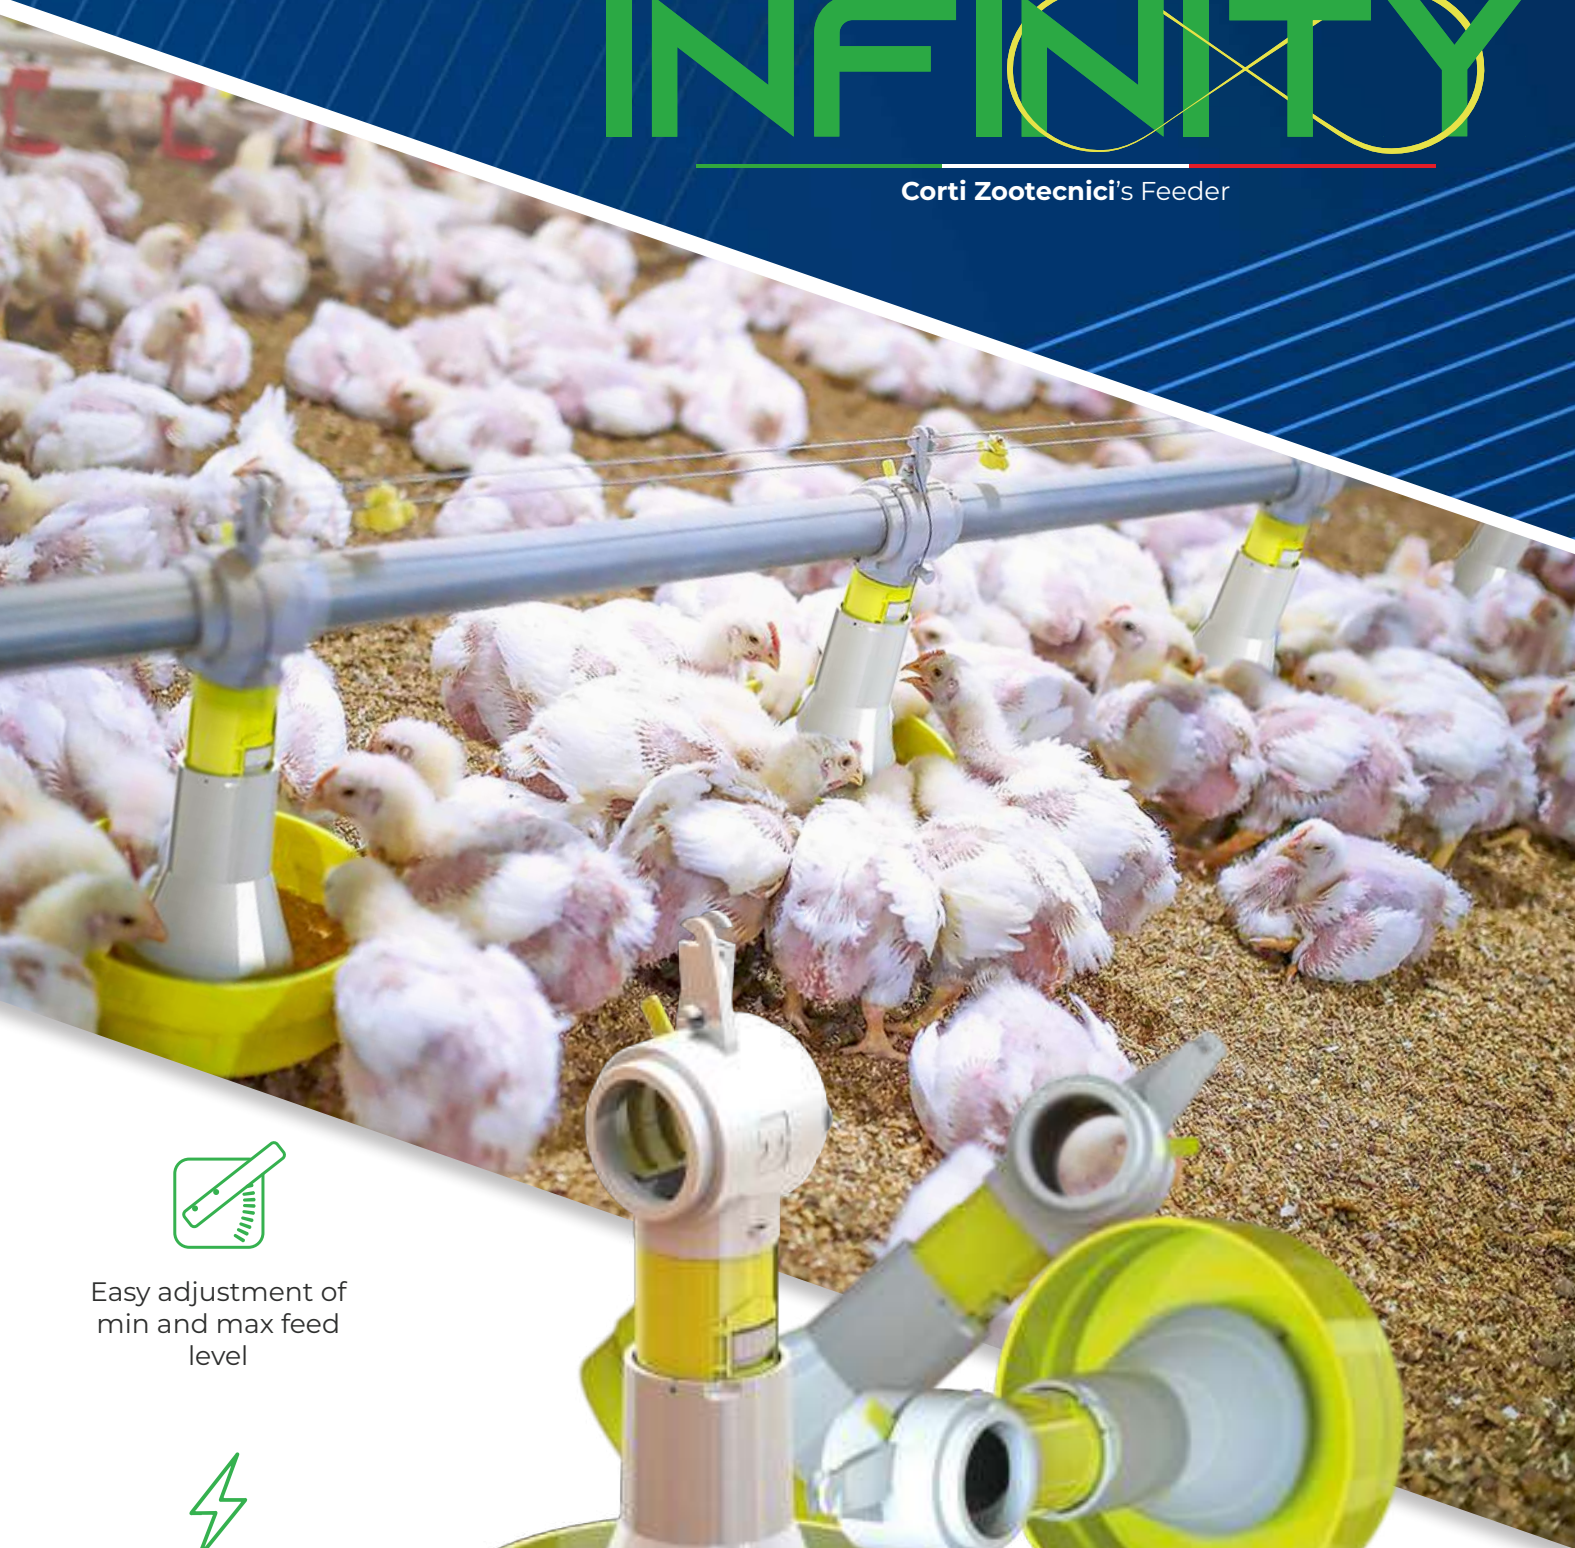

Easy adjustment of min and max feed level



Fast dispensing, always fresh feed, zero waste



Prevents the animal from entering the feeder



4456
Manual feeder for ground installation with automatic lifting kit

THE FEEDER THAT OPTIMISES THE ANIMAL'S GROWTH THROUGHOUT ITS LIFE CYCLE



4457
Cage feeder with automatic lifting kit



445509G
Anti-waste collar



Kit

- 4455 S**
Feeding with capacitive sensor
- 445508M**
Support for capacitive sensor
- 447215**
Capacitive sensor

- 4459**
Feeder with cap kit ø 48 mm

- 4459S**
Feeder with capacitive sensor ø 48 mm
- 445510M**
Cap kit with marbled anti-roost, ø 48 mm




4458
Manual adjustment rod

AUTOMATIC FEEDING SYSTEM



4470
UNICA | complete automatic feeder

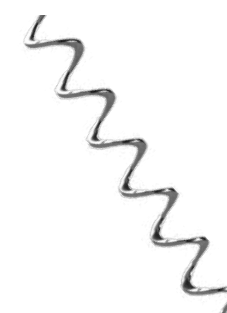

4476
Steel spiral for feeding (4470)



4474MP/SC
Plastic container top of line



4472M
Cap for automatic feeder complete with micro



48091
Electrifier, useful when the animal is standing on the drinking line



4479
Feed auger extraction control microswitch



Kit

4474SC6
Capacitive sensor kit delay 10 sec.



Kit

4474SC5
Capacitive sensor kit 5-wire sensitivity and time setting



Kit

4474SC
2-wire capacitive sensor kit timed 30 seconds

- 447401** Complete black bottom part
- 4474SC03** Plastic counter nut for 2-wire sensor
- 4474SC04** Plastic cable gland for 2-wire sensor
- 4474SC06** Capacitive sensor 2-wire delay 10 sec.

- 4474SC01** Micro-hole housing for sensor
- 4474SC501** Capacitive sensor 5-wire


- 4474SC01** Micro-hole housing for sensor
- 4474SC02** 2-wire capacitive sensor
- 4474SC03** Plastic counter nut for 2-wire sensor
- 4474SC04** Plastic cable gland for 2-wire sensor



- 4473M1 Towing drive MO. 0,75Kw-220V-50/60Hz
- 4473M1SC Towing drive MOT. MONOF 1 CV x SC
- 4473M2 Towing drive 1,5CV 230V-50/60Hz
- 4473M2SC Towing drive MOT. MONOF 1,5CV x SC
- 4473T1 Towing drive 3f 0,75Kw 230/400V 50/60Hz
- 4473T1SC Towing drive MOT. TRIFASE 1 CV x SC
- 4473T2 Towing drive MOT. TRIF 1,5CV230V/400/50NV
- 4473T3/4 Towing drive MOT. THREE-PHASE 1 CV x SC
- 4474 Plastic container with overhang ini x447
- 447401 Only black plastic lower part x4474



- 4477 Galvanised pipe clamping band
- 44753000P600 Pipe Galv. D=45 L=3000 P=600
- 44753000P750 Pipe Galv. D=45 L=3000 P=750
- 44753000P1500T Pipe Galv. D=45 L=3000 P=1500 SP 1,2
- 4476 Steel spiral for feeding 4470



4473T3/4SC
Drive unit with three-phase motor 0.75 KW for capacitive sensor



4490
Channel support assembly



5184
Sensor for supply container 4474

SISTEMA DI ALIMENTAZIONE PER GABBIE



4204R
Float for intensive rearing. Meets the need for high-pressure water capacity. The ø6mm nozzle allows perfect operation up to a maximum pressure of 5bar




4205
Mini-float for V-gutter; Can also be used in other applications where water regulation is required




42012UV
8 litre tank with float (Art. 4204R). Available in several versions depending on: colour | type | size | outlet position

END OF LINE FOR CAGES AND GROUND SYSTEMS

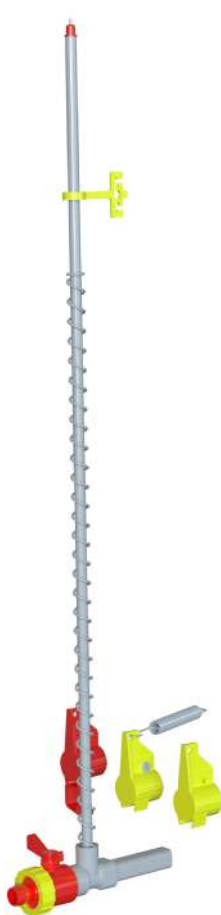


4854
End-of-line kit S.P. tap

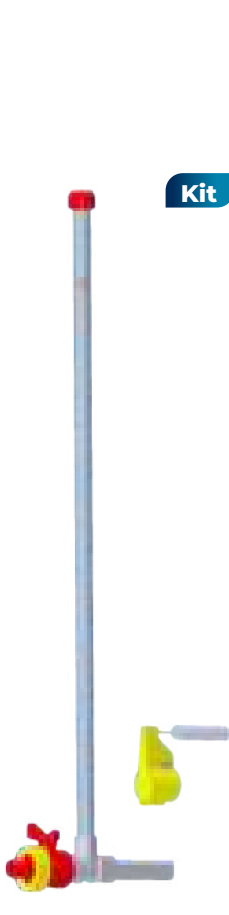

4854SE
End-of-line kit S.P. with rigid venting tap



4955
End-of-line kit square pipe



4956
End-of-line kit round pipe.




4957N
End-of-line kit square pipe control ø12



4896-4897-4896L
End-of-line cleaning brush
L: 52,5 cm, ø 9 mm
L: 89 cm, ø12 mm
L: 76 cm, ø12 mm

Line 22x22

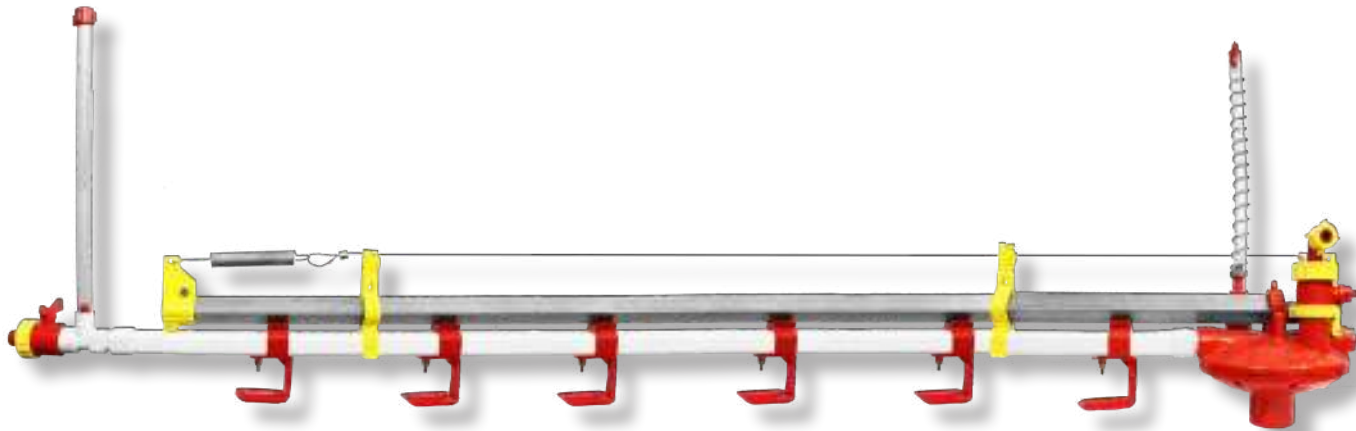

TURKEY SECTION



4260R
Acquapresente ST weaning
drinker 22x22cm



4626 | 4627
Drinker for square pipe for
fattening 2x22cm | 28x28cm



4742S
Support for ground square pipe



46266
Base for turkey square pipe
support



4456
Infinity weaning feeder



4440T
Automatic turkey feeder



4440TL
Automatic light turkey feeder



4440TP
Automatic heavy turkey feeder



4440T08
Collar for automatic turkey feeder



PIPES AND FITTINGS

Our pipes are made of high-quality materials that ensure strength and durability. Available in different sizes and thicknesses, our pipes are suitable for a wide range of uses, from industrial to domestic.

Our couplings are designed to ensure solid and reliable connections between pipes. Made with precision and durable materials, our couplings ensure a perfect seal and a long service life.

With our commitment to innovation and quality, you can rely on our catalogue to find the right components for every project.



FITTINGS, FLEX PIPES



4791
Connection T ø26,6mm
F - 3/4" F - 3/4" F



4792
Angle connection
ø26,6mm F - ø26,6mm F



4795
Linear connection
ø26,6mm F - 3/4" F



4368C
R6 square pipe joint for
gluing



4323
Connection T ø16-
18mm



420805N
Black rubber outlet
ø22mm
420803N nut
420802 gasket



4208N
Hose outlet ø22mm
4208 White version



4214
Tank outlet It 8 sect.
22x22mm



4378
T-connector for fineline
with hose connector



4810
End of line T-union R.P.
ø26.6 mm



4327
Cross connector
ø22mm



4351
90° angle fitting ø16-
18mm



4329V
Angle ø25mm for PVC
pipes



4321
Joint ø22mm



4724
End cap ø26,6mm
for square pipe with
gasket



4772Q
Rilsan spiral pipe
ø12x15mm - L: 6 mt



4103 Black flex pipe ø19x25mm
4104 Black flex pipe ø12x17mm
9101 Black flex pipe ø9x12mm
4107 Black flex pipe ø5,7x9,78mm
4105 Black flex pipe ø5x8mm



4108
Round pipe øint30mm
flex frame transparent



4193
Transparent flex pipe
ø19x24,5mm



4724R
Bayonet plug head ø
26.6 mm square pipe
with gasket



4725R
Bayonet plug head ø
26.6 mm square pipe
with gasket



4363AT26R
Bayonet plug square
pipe
28x28 | ø 26.6 mm



4363 A
S.P. adapter-head
28x28 mm | 22x22 mm



4363AT
S.P. adapter-head
28x28 mm | ø=22 mm



4744
3/4" threaded plug
with gasket



4797
Nipple fitting 3/4 "M
with gasket



4798
Pipe union for pipe
ø26.6 mm



4953FO
Upper cap for end of
line with gasket



4205P
Hose connector with
quick-release coupling
1/2F



4363AT26
S.P. adapter-head
28x28 | ø=26.6



437501
T-connector for 3/4"
threaded square pipe



437601
T-piece for end of line
ø25 mm threaded
3/4" F



AI 005
Rigid 28x28 pipe joint
for gluing



4723
Angle fitting for trans-
parent pipe



4366 | 4363F
Joint ties for pipes
22x22 | 28x28



4366V | 4363V
Joint ties for pipes
22x22 | 28x28



4104R 1/2"
Ribbed flex hose (1/2")
4104R 3/4"
Hose flex hose (3/4")



MF70111
PP T-piece 3/4" - 3/4" F



MF70311
90° pipe in PP 3/4" - 3/4" F



4314
Cap ø22mm

4329 Angle connection 90° ø22mm

4330 T-connector ø25-30mm

4331 T-connector ø12-14mm

4733T Joint for round tube ø26,6mm

4786 T ø26,6mm F - 3/4" F - ø26,6mm F

4787 T ø26,6mm F - ø26,6mm F - 3/4" F

4788 T ø26,6mm F - ø26,6mm F - ø26,6mm

4790 T 3/4" F - ø26,6mm - 3/4" F

4793 Angle connection ø26,6mm F-3/4"

420104 Threaded cap 1/2"

4800 Reduction 3/4" M - 1/4" F

420803N Nut 3/4" F for out 22mm

420802 Gasket 3/4"



4301
Flex head ø22mm for square pipe



4301R
Rigid head ø22mm for square pipe



4361FO
Pipe connector extension PVC 22x22mm



4363Q
Extension fitting for PVC pipe 28x28mm



4369
Square pipe head with sealing gasket, outlet ø22mm



9307
Header for square pipe ø10mm



43902G
Head ø20mm double gasket for 19x24.5mm square pipe



4394
Joint for square pipe with seal



43912G
End cap ø10mm double gasket for square pipe 9x12mm



4725
Header for square pipe ø26.6 mm for connection to pressure regulator



4368LT
S.P. joint 22x22 line cleaning control



4365 Elastic joint for square pipe L:10cm
4367 Elastic joint for square pipe L:12cm



4368 Coupling for external square pipe with seal L:8cm
4368L L:14cm



4317
Corner header for square pipe ø22mm



4368 A
Rigid corner joint square pipe 22x22cm

EGG AND MANURE CONVEYOR BELTS

Our egg conveyor belts are carefully designed to ensure the safe and gentle transport of eggs of all sizes. Made of materials that minimise the risk of damage, they ensure that the eggs reach their final destination intact.

For the efficient transport of eggs, we offer robust and reliable conveyor belts. Our range includes belts designed to handle high volumes of chicken manure cleanly and efficiently. Durable materials and clever design ensure that the manure is transported without spillage, helping to keep the environment clean and hygienic.



ACCESSORIES FOR BATTERY MANUFACTURERS



9416
Oetiker-type clamp
pliers



9411 | 9410
Staple pliers ø4mm |
ø6mm



4590 M Staple CL 23-
23,5mm for pneumatic
stapler
9590 M CL 12-16,5mm



9412 | 9413
Galvanised staple
ø4mm L:5mm
| ø6mm L:7mm



4395 2000
R-shaped hand pro-
tection profile L=2mt



9335
Plastic-coated cable
ø5,2mm 970kg app



9338
Plastic-coated cable
ø7,8mm 2600kg app



4738
Galvanised spring fixing
ø1.5 mm square pipe



9660 Spiral spring 21 L=60mm
9661 Spiral spring 28 L=72mm
9662 Spiral spring 36 L=84mm
9663 Spiral spring 56 L=110mm



OFTCN 0001
Air pipe joint



OFTCN 000S
Air pipe cap



ZUTU0001SEMEC
Air pipe joint



ZUTU000TEMEC
Air pipe cap



ZUTU54..EUMEC
Air pipe



ZUTU0002EMEC
Air pipe connection



9607
PVC profile for cages



9607T
Cap for profile 9607




9607G
Profile joint 9607

BELTS FOR COLLECTING AND CONVEYING EGGS

Uova



268006PP
Polypropylene woven tape
WIDTH from 9 cm to 11 cm

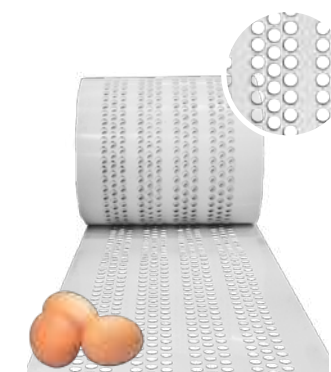

Perforated PP belt ø20mm
WIDTH From 7 cm to 500 cm
THICKNESS from 1 mm to 2.4 mm

ULTRASONIC WELDER



040180
Ultrasonic welder 250/400 watt for PP strip art. no. 268106

04018001
Ultrasonic welder 1.2 and 1.6 - on request also for egg conveyor
belt

04018002
Handle

BELTS FOR COLLECTING AND CONVEYING MANURE

Pollina



2681...
MANURE COLLECTION BELT

Smooth polypropylene belt
WIDTH 100 mm to 2500 mm | THICKNESS 0.5 to
2.4 mm
LENGTH max. 1000 m* x 1 mm thickness * length
is variable depending on width dimension.

Available in various thicknesses



2691...
MANURE DRYING BELT

Perforated polypropylene belt v type MDS
WIDTH max. 2000 mm THICKNESS 1.2 mm to 2.4
mm

NEBULISATION SYSTEMS

Kit



53200CA
Nebulizer attachment kit
ø12mm thread 1/8"

53200C
Nebulizer attachment kit
ø 20mm thread 1/8"



5320A
Nebulizer U=0.4 T=G B.P. (orange)



5320V
Nebulizer U=0.5 T=G A.P. (green)



5320G
Nebulizer U=0.3 T=G M-B.P. (yellow)

Kit



53300CA
Nebulizer attachment kit
ø12mm thread 3/16"

53300C
Nebulizer attachment kit
ø20mm thread 3/16"



INOX NEBULISER
Nozzle available in different diameters (0.30 and 0.40) thread 3/16"

53500I
Medium pressure nebuliser (ø 0,4mm)

53600I
High pressure nebuliser (ø 0,3mm)

53700I
Nebulizer nozzle assembly ø 0.2 mm red

Capacity table



Art. 5320 G

Nozzle colour: YELLOW
ø 0,3mm



Art. 5320 A

Nozzle colour: ORANGE
ø 0,4mm



Art. 5320 V

Nozzle colour: GREEN
ø 0,5mm

Pressure	Water flow rate in litres/hour	Water flow rate in litres/hour	Water flow rate in litres/hour
5bar (70psi)	6,5	6,9	not tested
10bar (140psi)	8,46	8,95	10,50
20bar (280psi)	10,44	11,4	14,40
30bar (420psi)	11,64	13,56	16,32
40bar (560psi)	13,36	14,66	18,00
50bar (700psi)	14,1	15,56	21,18



Low pressure



5370
Low pressure nebuliser
type BR fitted

Codes	Descriptions	Material
53701	Attachment kit	Polypropylene
53705	Filter D14.8-50micron	Nylon
53001	Threaded Nut M16.5x1.3	Acetal Resin
53706	Nebuliser disc kit	Acetal Resin
5371	Anti-Drip Kit	Polypropylene

Pipes and Fittings



5110
PVC round pipe for low
pressure ø20mm - øint 17mm

5114
Tubo tondo PVC per alta
pressione ø20mm - øint 13
mm



530010T
T- connector for nebulisation
system øint 20mm



530010A
Angle connection for
nebulisation system øint
20mm



530010M
Nebulisation system
connection øint 20mm




53007
Pressure gauge ø63 for press.
0-12 att.rad.




53009
2HP three-phase pump
50HZ

SLATS AND ACCESSORIES

Pigs



6500060040
Slat for pigs and piglets 60x40 | height 5 cm | capacity 110 kg



6600060040
Sow slat 60x40 | height 8 cm | capacity 250 kg

Pigs



66000
Sow slat 60x40 | height 8 cm | capacity 250 kg



Pigs




6200 Pig feeder

620001	Pig dosing top	Polypropylene
620002	Damper	Polypropylene
620003	Dispensing sliding cone	Polypropylene
620004	Lower cone	Polypropylene
620005	Lid for dosing tube	Polypropylene
620006	Dosing ring	Polypropylene
620007	Ring D11-46-6-74gr.	
620008	Dosing rod	
620009	Dosing tube L-400	
6200010	Dosing kit for pigs	Acetal Resin, ABS
6200011	Dosing kit for pigs	Acetal Resin, ABS
6200012	Dosing kit for pigs	Acetal Resin, ABS
6200013	Swine caulker	
6200014	Swine dosing rope rosette	

Poultry



4400 S
Poultry slat 90x60 cm



Poultry



4400 C | 4400 L
Poultry slat 60x100 cm | 60x120 cm



SLATS

pigs, piglets and sows



Polypropylene with
UV protection



Resistance
250 kg





FAMILY SECTION

Section dedicated to the family of poultry feeders and drinkers, designed to ensure the well-being and productivity of your animals. Discover our wide range of products designed to meet the specific needs of poultry families, offering practical, hygienic and durable solutions.



CIRCULAR DRINKERS



4018
10 lt plastic siphon drinker



4014
1.5 lt plastic siphon drinker



4012
3 lt plastic siphon drinker



4015
Automatic circular drinker for chickens



4013
Plastic siphon drinker 5 lt

FEEDERS FOR POULTRY FARMING



8250
18 kg plastic hopper feeder for chickens



8251
18 kg plastic hopper feeder for chicks



8254
Lid for hopper feeder



8252
10 kg plastic hopper feeder for chickens




8253
10 kg plastic hopper feeder for chicks



4501
Feeder plate chicks ø40 cm



8357
Winner plastic hopper feeder 12kg approx. for chicks



8349 | 8350 | 8351 | 8346 | 8347
Feeder plate for chicks and pullets 50cm | 40cm | 30cm | 100cm | 75cm



DRINKERS FOR CONICULTURE

Rabbits



9002 Drip drinker with stainless steel elastic connection, connectable with ø9mm flex pipe art. 9101. The tank should be positioned 20 cm higher. The ideal position is 25 cm from the bottom of the cage.

9002MF As art. 9002 with T-joint MF

4001	Drinkers Kit 4001
9999	Pipette x 9002
900201	Stainless steel connection
9301	Connection to T DIA 10

Rabbits



9003 Drip drinker with stainless steel screw connection and T-joint
9003MF As art. 9003 but with MF T-joint

Rabbits



9008 Three-piece plastic bottle drinker

Rabbits



9015 Metal drinker

Rabbits



9005 Plastic bottle holder drinker

900501	Bottle-holder cup
900502	Wedge
900503	Bottle-holder ring

Rabbits



4510 Multipurpose constant level drinker
451001 Rubber gasket


SLATS FOR CONICULTURE

Slat



RO 500127
Moulded slat for rabbit L: 27 cm

RO 500251
Moulded slat for rabbit L: 51 cm




Slat



960924
Moulded slat for rabbit 49,5 cm x 24,75 cm

960914
Moulded slat for rabbit 49,5 cm x 14,5 cm


960935
Moulded slat for rabbit 49,5 cm x 35 cm



Rug




4500390500
Nesting mat 39x50 cm



8180
Gas breeder | infrared | 2,500cal/h for 500 animals approx. | with safety valve

960924

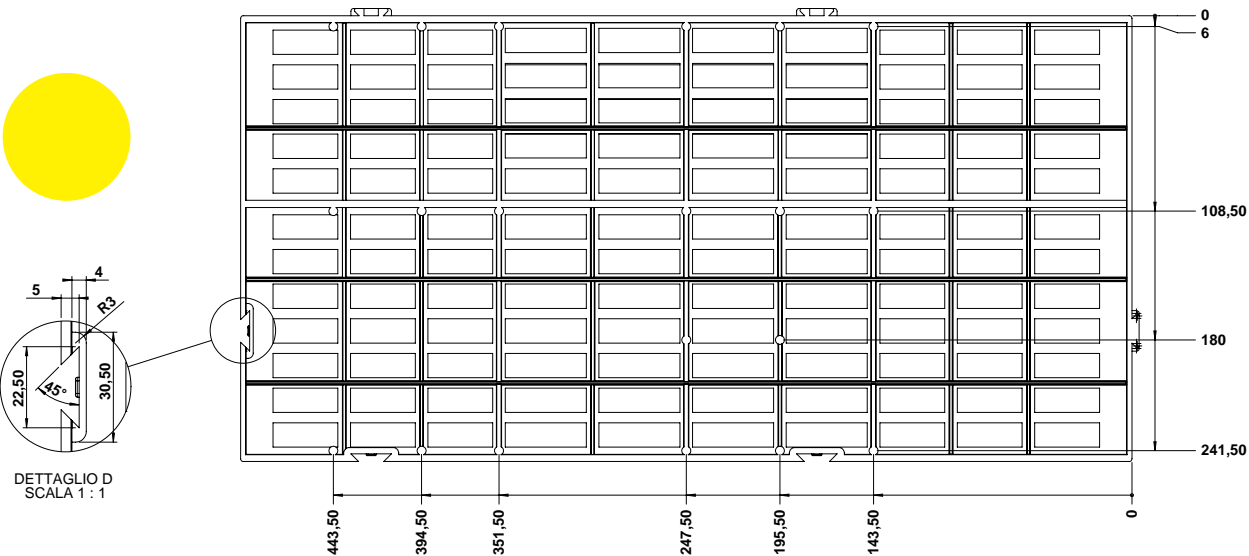

FEEDERS AND ACCESSORIES FOR RABBIT FARMING



9503 | 950202
Plastic feeder with non-rotting edges 1.8kg app. | lid

965001 | 965002
Rabbits' nest 37x25x15cm | Rabbits' nest bottom cover 35,4x23,7cm

965001 BR/BB/BG | 965002 B
Recessed nest for rabbits 39,5x24,5cm | Nest mat 31x16,5

960350 Seam for slat L=50cm
960360 L=60cm | **960373** L=73cm
960398 L=98cm | **9603** L=100cm

9601
Plastic profile for rabbits



9653
Long-barrel gas burner for disinfection and disinfestation of cages and poultry house

9651
Handy 19x12cm plastic card holders for easy writing, suitable for all types of nurseries

9652
Diazin: ideal for animal and livestock welfare

9655
Rabbit scales capacity: 10kg



DRINKERS FOR HOBBY BREEDING

Laying hens



4028 A drinker for laying hens with elastic coupling, to be applied to drinker 4005 with tray 4618, perfect for small systems, avoids the use of square pipes. To be attached to the cage by means of the stainless steel elastic connection and the special T-piece.

Max 15 animals

Laying hens



4038 Drinker with stainless steel screw connection, as art. 4028

Chicks



4029 Chick drinker with elastic connection, as art. 4028 but equipped with automatic tray + T-connector. Also ideal for day-old chicks and boilers.

Max. 20 animals

Rabbits



4039 Chick drinker with elastic connection, as art. 4038 but equipped with automatic tray + T-connector. Also ideal for day-old chicks and boilers.

Max. 20 animals

Ornithology



4505 Automatic drinkers for ornithology
4504 Automatic drinkers for quail

450501	Upper part with nozzle
450502	Cup for ornithology
450503	Sheet metal counterweight
450504	Stick-stop tube

Hens



4030
28 litre plastic siphon drinker

403001	Cap gasket
403002	Plastic cap
403004	Seal ring for closure
403006	Pond holder
403007	Upper ring
403008	Back case

Ø10MM FITTINGS AND ACCESSORIES



9301
T-connector Ø10mm



9302
Cross connector Ø10mm



9303
Angle connection Ø10mm M/F



9304
Cup Ø9mm



9305
Brass tap with hose connector Ø10mm



9308
Joint Ø10mm



9311
Reduction in plastic Ø22-10mm



9313
Angular joint Ø10mm



9314
Plastic hose outlet Ø10mm



9333
1/8" conical threaded cap



9316
T-connector Ø10mm M/F



9101
Black flex pipe Ø9x12mm



264519
Minifilter with Ø10mm plug



9309
Water inlet for square PVC pipe



4307 Anti-rotation support
4332 Corner extension
4304 extension 5,5cm
4305 extension 12cm
4308 extension 9cm



264801 | 264901
Plastic beak covers for heavy and light pheasants



264524 | 264525
Metal pheasant coverlet | Metal pheasant ring



264802 | 264902
Plastic ring for heavy and light pheasants



264498 | 264501
Glasses for laying hens and pheasants



264518
Arrow for spectacles and for beak covers



2500D
Digital incubator capacity 25 eggs approx.
5000D
Digital incubator capacity 50 eggs approx.



5005
Automatic egg turner



6060
Constant level plastic drinking trough for dogs, horses and other animals. The highly resistant resin makes it suitable also for large animals



264601026
Chicken plucker 220V - 50Hz - 0.5HP - 24 fingers Before use, immerse the animal in hot water (55°C)
Productivity: 80 chickens/hour, single-phase motor



26460125
Plucking fingers

YOUR INCUBATOR
ALWAYS SMARTER!




Wi-Fi
connection



Adjust values from
your smartphone



Stores hatching
data

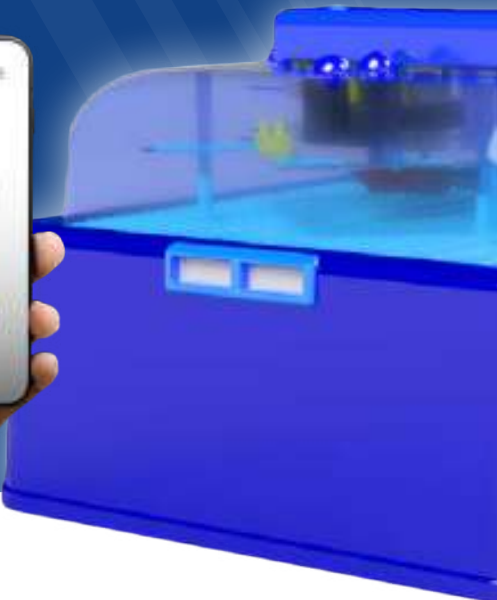



Use a **QR code reader** on your device to access our website.

Via Volta 4, Monvalle (VA) 21020, Italy | info@cortizootecnici.com
+39 0332 799 985

www.cortizootecnici.it

📺 @ f in

PRODUCT CATALOGUE


Articles and Accessories for Breeding



Via Volta 4, Monvalle (VA) 21020, Italy
info@cortizootecnici.com | +39 0332 799 985

www.cortizootecnici.it

📺 📷 📱 📺



Use a **QR code reader** on your device to access our website.